


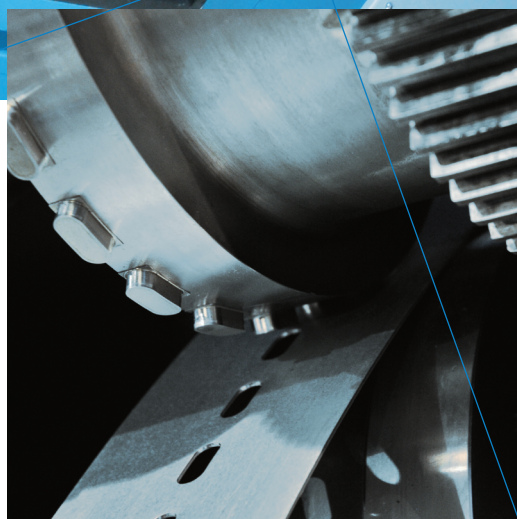
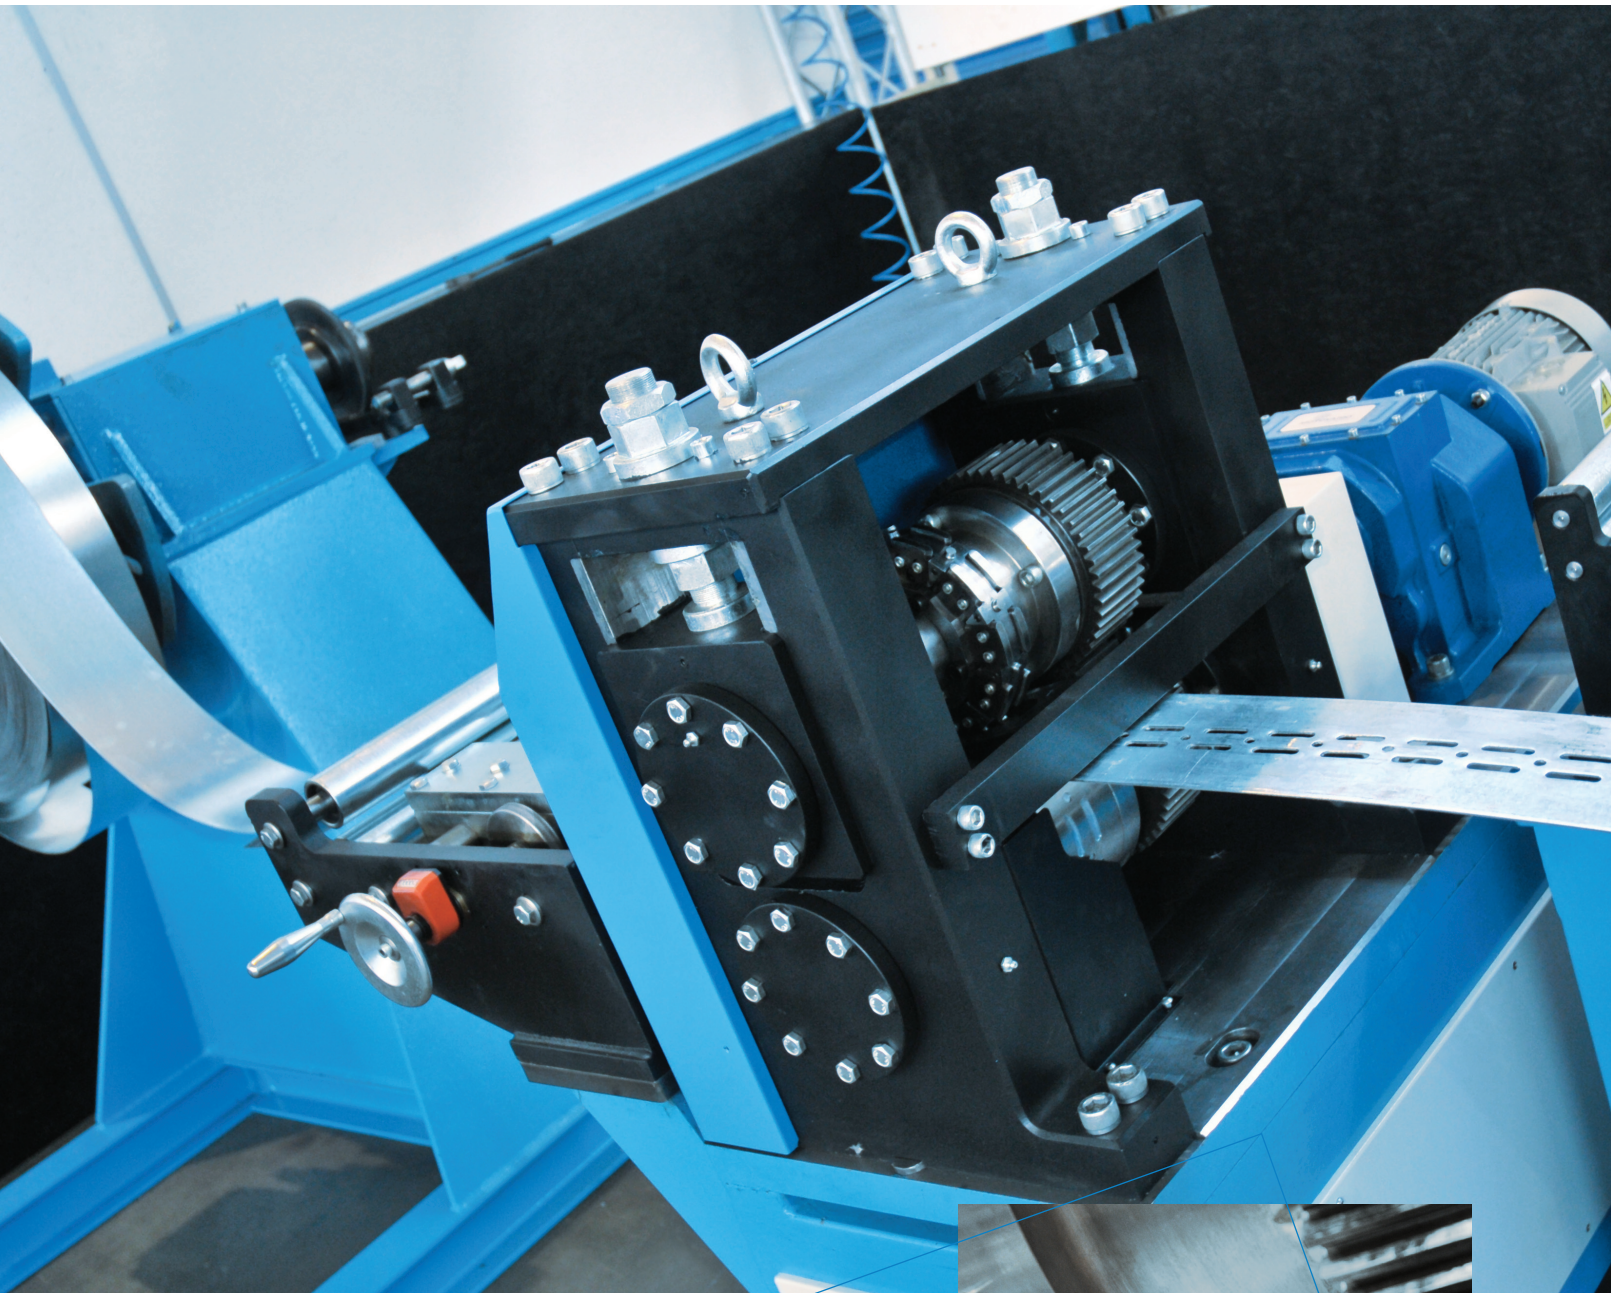


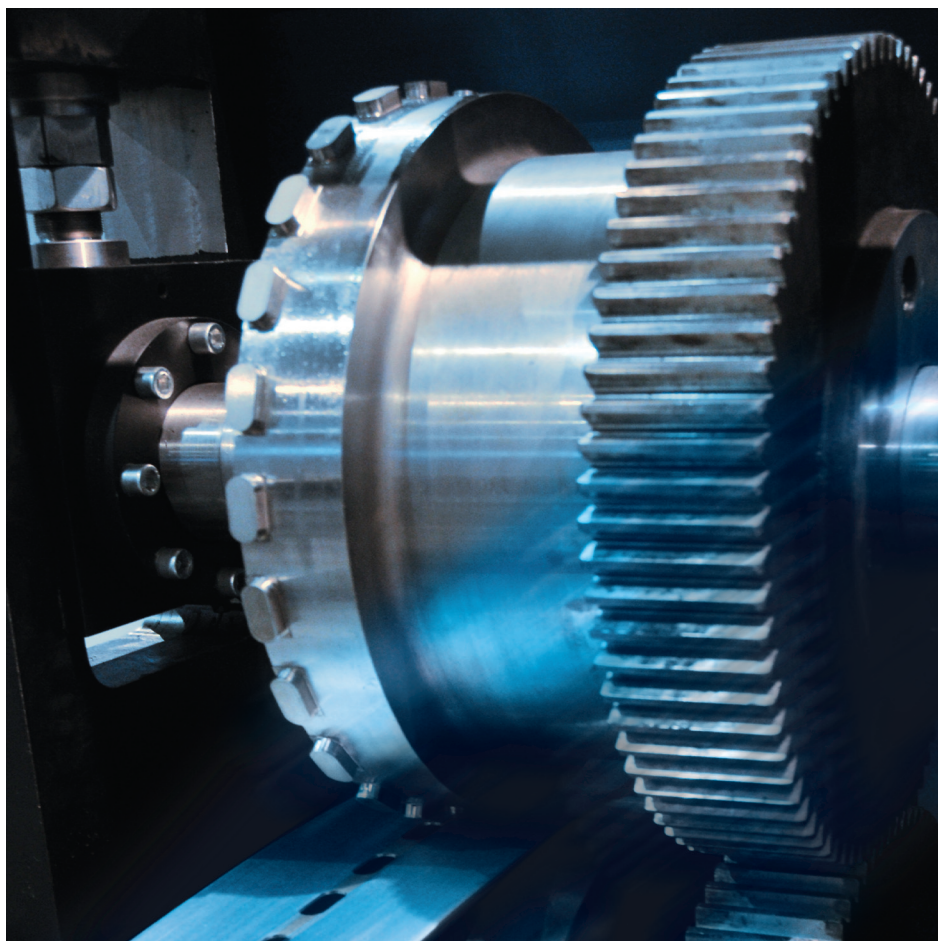

ROTARY PUNCH

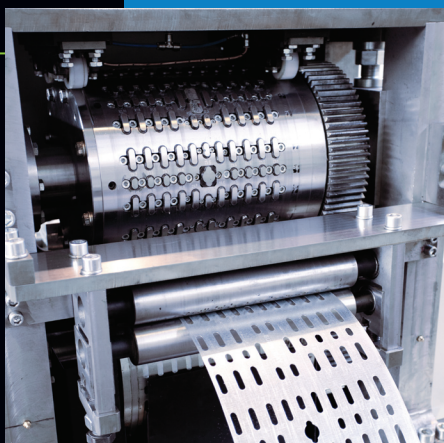

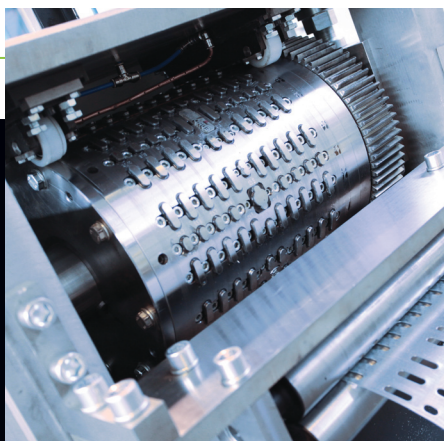

TEHNIICAL DATA – ROTARY PUNCH

| | |
|----------------------------------|---------------------------|
| Tool size [mm] | 200 - 500 |
| Dimensions [mm] (B x H x T) | 1500x1400x1100 |
| Standard material widths [mm] | 50-250 |
| Standard material thickness [mm] | 0.3 - 2.5 |
| Tools material | X 155 CrVMo 12-1 (1.2379) |
| Torque ranges approx [Nm] | up to 1100 |
| Power [kW] | 2.2 - 5.5 |
| Perforations speed [m/min] | 20 - 100 |

ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ – РОТАЦИОННЫХ МАШИН

| | |
|------------------------------------|---------------------------|
| Инструмент размеры [мм] | 200 - 500 |
| Измерение [mm] (B x H x T) | 1500x1400x1100 |
| Стандартная ширина материала [mm] | 50-250 |
| Стандартная толщина материала [mm] | 0.3 - 2.5 |
| Материал инструмента | X 155 CrVMo 12-1 (1.2379) |
| Крутящий момент [Nm] | до 1100 |
| Мощность [kW] | 2.2 - 5.5 |
| Скорость перфорации [m/min] | 20 - 100 |